



U2U Adapter

Storage For One U.2 SSD

Bandwidth up to 10 Gbps, supports SFF-8639 connector


U2U Adapter Provide USB 3.2 Gen 2 Type-C to C cable , users can use the Type-C to C cable to connect to any PC or Notebook with USB Type-C or Thunderbolt™ 3/4 (USB-C) interface, the transmission performance can be up to 10 Gbps. Whether it is used for searching files, editing photos or watching the 4K high resolution videos, U2U Adapter will bring you the extremely enjoyment of video and audio quality.

Futures

- 1.Supports U.2 SSD, suitable for Mac and PC.
- 2.Provide USB 3.2 Gen 2 transmission interface, up to 10Gbps bandwidth.
- 3.Support USB Type-C and Thunderbolt™ 3/4 (USB-C) interface, plug and play.
- 4.Replaceable storage device.
5. LED hard drive indicator light makes operation and maintenance easier.


Suitable for Mac and PC

U2U Adapter built-in high-speed USB 3.2 Gen 2 transmission interface, can install one U.2 SSD, suitable for Mac and PC operating platforms.

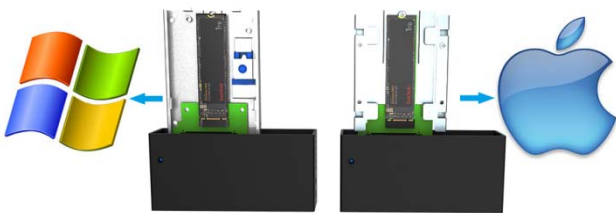

Support USB Type-C & Thunderbolt™ 3/4

U2U Adapter can be connected to any PC or Notebook with USB Type-C or Thunderbolt™ 3/4 (USB-C) interface, the transmission performance can be up to 10 Gbps. Whether it is used for searching files, editing photos or watching the 4K high resolution videos, U2U Adapter will bring you the extremely enjoyment of video and audio quality.

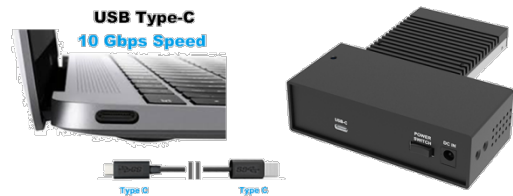

Hot-swappable Disk Tray

U2U Adapter provides SFF-8639 connector, can support U.2 NVMe SSD, and it has the advantage of replaceable storage device.




LED Indicator

The U2U Adapter provides LED hard drive status indicators, users can clearly understand the access status of the hard drive through the change of the LED light, making the operation and maintenance of the U2U Adapter easier.



Product View

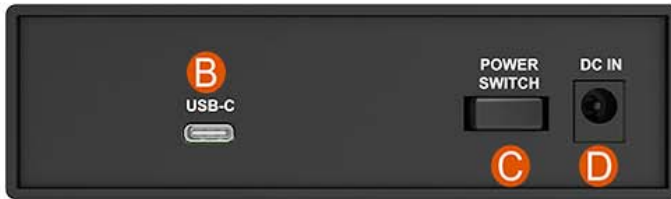

A. HDD status indicator LED
B. USB 3.2 Gen 2 Port (10Gbps) x1

C. Power Switch
D. Power Port (DC IN)
E. SFF-8639 Connector



Interfaces	1 x USB 3.2 Gen2 Type-C (up to 10Gbps)
Compatible Drive	1 x U.2 SSD
Certification	CE / FCC
RAID Mode	JBOD
Support Operating System	Windows 7 or Later; macOS 10.10 or Later; Linux
Electrical and Operating Requirements	<ul style="list-style-type: none"> *Line voltage: 100-240V, AC *Frequency: 50Hz to 60Hz, single phase *Maximum continuous power: 24W *Operating temperature: 0° to 40° C (32° to 104° F) *Storage temperature: -20° to 47° C (-4° to 116° F) *Relative humidity: 5% to 95%, non-condensing
Product Code	EAN: UPC:
Package Accessories	1 x U2U Adapter 1 x USB Type-C to Type-C Cable 1 x Adapter 1 x Power Code 1 x Quick Installation Guide Accessory Kit